


Measuring and dimension information

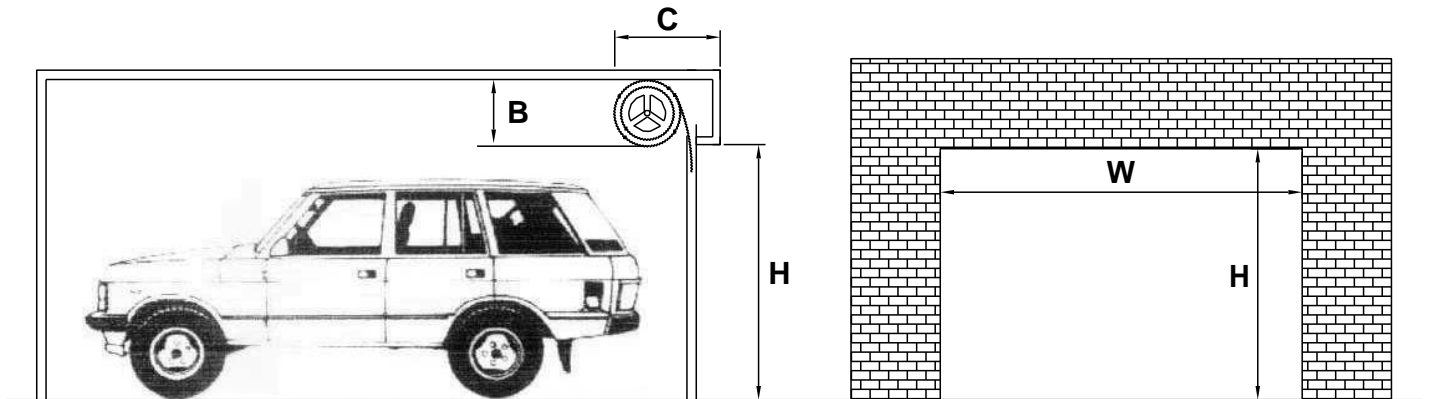

Side Clearance (A)

A minimum of 75mm is required for side clearance.

Headroom Clearance (B) - The height from the underside of the Lintel to the ceiling or lowest ceiling joist.

The headroom required is normally 300MM (12") for the Smooth-glide Roller Door, although if you do not have the sufficient headroom above the lintel the door can come lower than the lintel as long as you have sufficient height for your vehicle (Once we have the dimensions we can work this out for you.)

Clearance back into garage (C)

The clearance back into the garage must be at least 300mm.


Other requirements

1. The Area around the opening needs to be structurally sound and strong enough to support the door.
2. The lintel must be flush with the opening piers and not protruding forwards or backwards.
3. The surface to which the door is to be fitted should be reasonably smooth and flush.

CUSTOMER SUPPLIES DETAILS:

Note: All dimensions in mm please

W	=	mm
H(L)	=	mm
H(R)	=	mm
A(L)	=	mm
A(R)	=	mm
B(L)	=	mm
B(R)	=	mm
C	=	mm

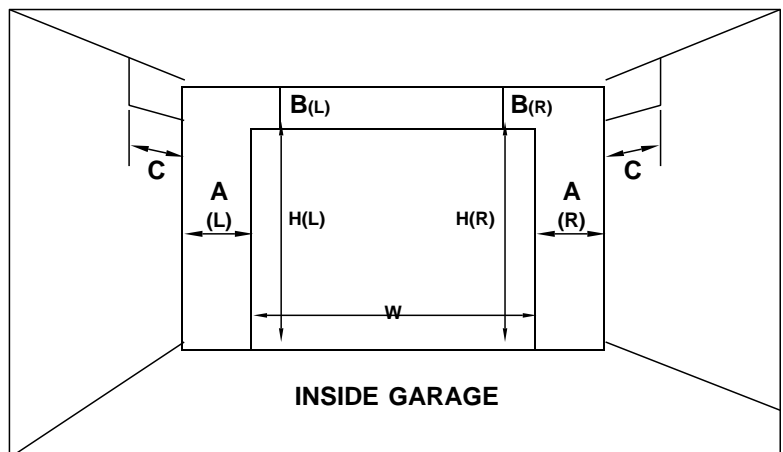

Door Colour _____ Contact Name: _____ Tel No.: _____

Address: _____